


Synergie 109 Waschbecken-Unterputzarmatur



technical drawing:

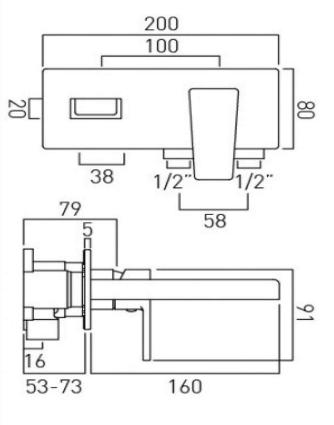

description: 2 hole basin mixer

single lever wall mounted

with water flow aerator ceramic cartridge CAR-K35B

2 x 1/2" inlets


min-max wall mount 53-73mm

finishes: chrome

recommended flow regulator product code: flow regulator fitted as standard

guarantee: 12 year guarantee

minimum operating pressure: 0.2 bar LP flow rate at 3.0 bar flow pressure: 6 l/min



'mixed measurements' refers to equal hot and cold water supply flow rate for unregulated flow unless flow regulator fitted as standard

certificates and awards:



cert no. 1505019

www.baedermax.com